


101151H

1/2 CV

**DEEP WELL
SUBMERSIBLE PUMP**

**Pumps up to 890 US GPH
Maximum Head of 225 Feet**

**10
GPM**

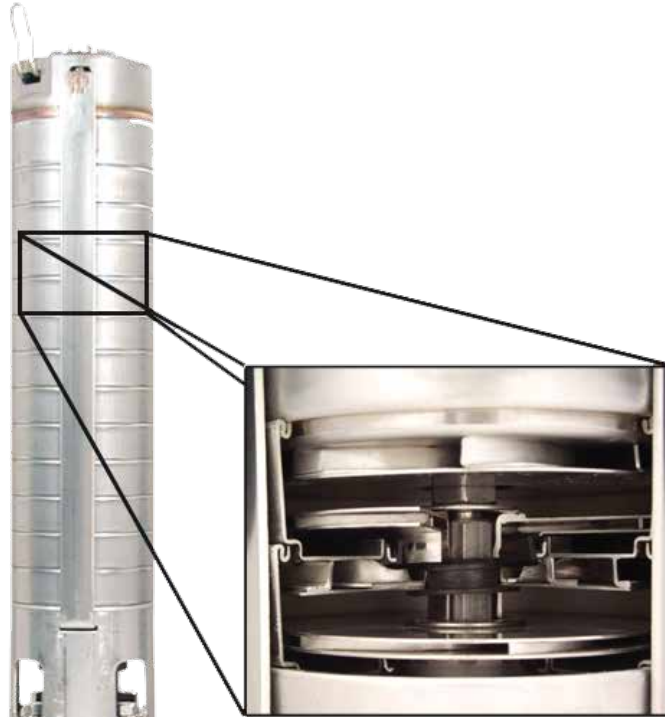

**3 WIRE + GROUND / 230V
9 STAGES**

PUMP CAPACITY

HEAD		LPH	US GPH
225'	68,5m	1380	365
200'	61,0m	1990	525
180'	55,0m	2250	595
160'	49,0m	2500	660
140'	43,0m	2725	720
120'	36,5m	2970	785
100'	30,5m	3180	840
80'	24,5m	3370	890

Friction loss in pipe not included

Best efficiency

Pressure switch set to :	Depth :
20/40 PSI	73' - 123'
30/50 PSI	50' - 100'



- Made of non-corrosive 316 stainless steel material
- Precision machined stainless steel impellers and diffusers
- NEMA standard stainless steel interchangeable pump head
- Hexagonal stainless steel drive shaft

Recommended for homes, cottages and farms for installation in water wells which are 4" and larger in diameter.

Complete sub-pack.



Water in
PUMP SYSTEM

