


# SPRINKLER PUMP

Designed for a maximum vertical lift of 25' (7.5m) which water source can be a well, a sand point, a lake or a river.

**MODEL 506530SS**

## FEATURES:

- TEFC motor 3/4HP 115/230V 60Hz totally enclosed, bearing to bearing, stainless steel shaft with automatic thermal and overloaded protection.
- Stainless steel pump body, large capacity, easy to prime.
- Designed for intermediate or continuous operation.
- High performance noryl impeller.
- Built-in Noryl injector
- Stainless steel rotary mechanical seal.
- 1" garden hose adaptor included.
- Strong and practical transportation handle.
- Capacity up to 900 US GPH.

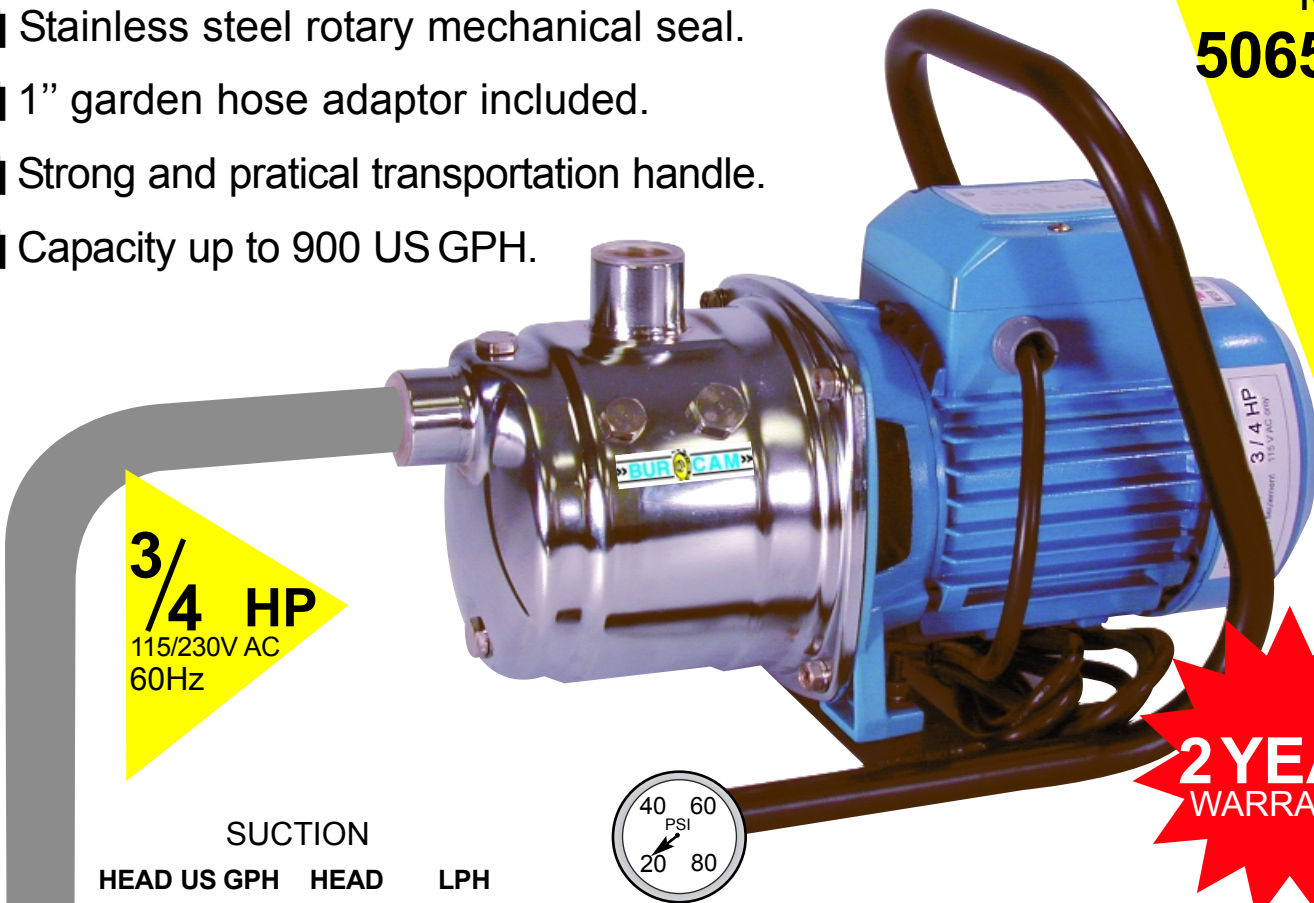

**3/4 HP**  
 115/230V AC  
 60Hz

**2 YEAR WARRANTY**

SUCTION HEAD			
US	GPH	HEAD	LPH
5'	900	1.5m	3400
10'	750	3.0m	2840
15'	640	4.5m	2425
20'	560	6.0m	2120
25'	475	7.5m	1800



FRICION LOSS IN PIPE NOT INCLUDED

## APPLICATION:

- To be used in a residential, cottage and farm application