




300500K

1/3 HP

COMPLETE SUBMERSIBLE SUMP PUMP

**Pumps up to 3000 US GPH
Maximum Head of 18 Feet**

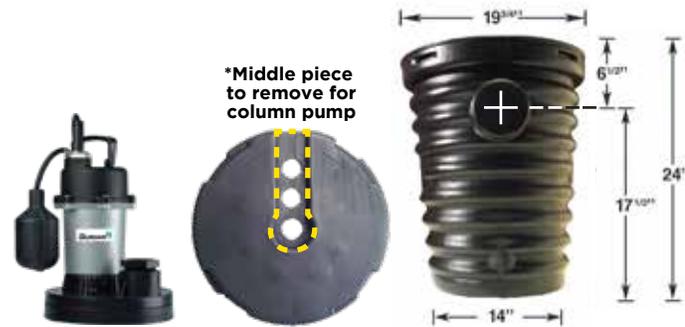

PUMP CAPACITY			
HEAD		LPH	US GPH
18'	5,5m	5500	1450
15'	4,5m	7800	2000
10'	3,0m	9500	2500
5'	1,5m	11350	3000

Friction loss in pipe not included



Basin OVERALL DIMENSIONS 19 3/4" x 24"

Basin

- Polyethylene construction
- Rust-free basin and lid
- This basin has pre-scored openings for pipes and wires
- May be used with column sump pump by removing the middle piece*

Pump


- Tethered switch
- Reduces heat
- Stops premature rust
- 1 1/2" discharge with 1 1/4" reducer
- Oil-cooled motor
- 8' electrical cord



Water out
PUMP SYSTEM

www.burcam.com



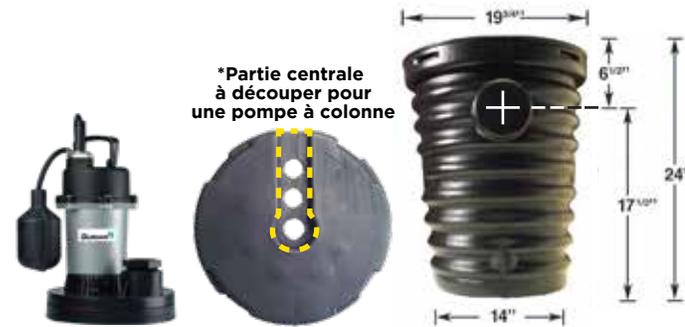

CAPACITÉ DE LA POMPE

TÊTE	LPH	GPH	US
18' 5,5m	5500	1450	
15' 4,5m	7800	2000	
10' 3,0m	9500	2500	
5' 1,5m	11350	3000	

Pertes dues à la friction non incluses



**DIMENSION GLOBALE
du bassin
19 3/4" x 24"**

Bassin

- Robuste bassin en polyéthylène
- Bassin et couvercle non corrosif
- Les ouvertures pour les tuyaux et câbles électriques sont pré-moulées dans le bassin
- Peut être utilisé avec une pompe à colonne en découpant la partie centrale*

Pompe

- Flotte mécanique
- Dissipe la chaleur
- Protège contre la corrosion prématurée
- Décharge de 1 1/2", adaptateur de 1 1/4"
- Moteur refroidi à l'huile
- Câble électrique de 2.4m

