



INSTALLATION INSTRUCTIONS

MODEL 450446W

VERTICAL MAGNETIC SWITCH

2190 Dagenais Blvd. West Tel. : 514.337.4415
Laval (Quebec) Fax : 514.337.4029
Canada info@burcam.com
H7L 5X9 see us at www.burcam.com

STEP 1


Install the switch to the discharge pipe using the enclosed clamp. The bottom of the clamp should be mounted **9 1/2" (24cm)** above the pump discharge.

STEP 2

The minimum water level adjustment was done at the factory and should be appropriate for most submersible sump pumps. You may change the adjustment by raising or lowering the position of the clamp. When the float is at its lowest level the pump discharge and the suction intake must be submerged otherwise the pump will draw in air and no water will be evacuated due to an airlock.

STEP 3

Plug the switch power cord in the receptacle, then plug the pump power cord in the piggy-back of the switch power cable plug.

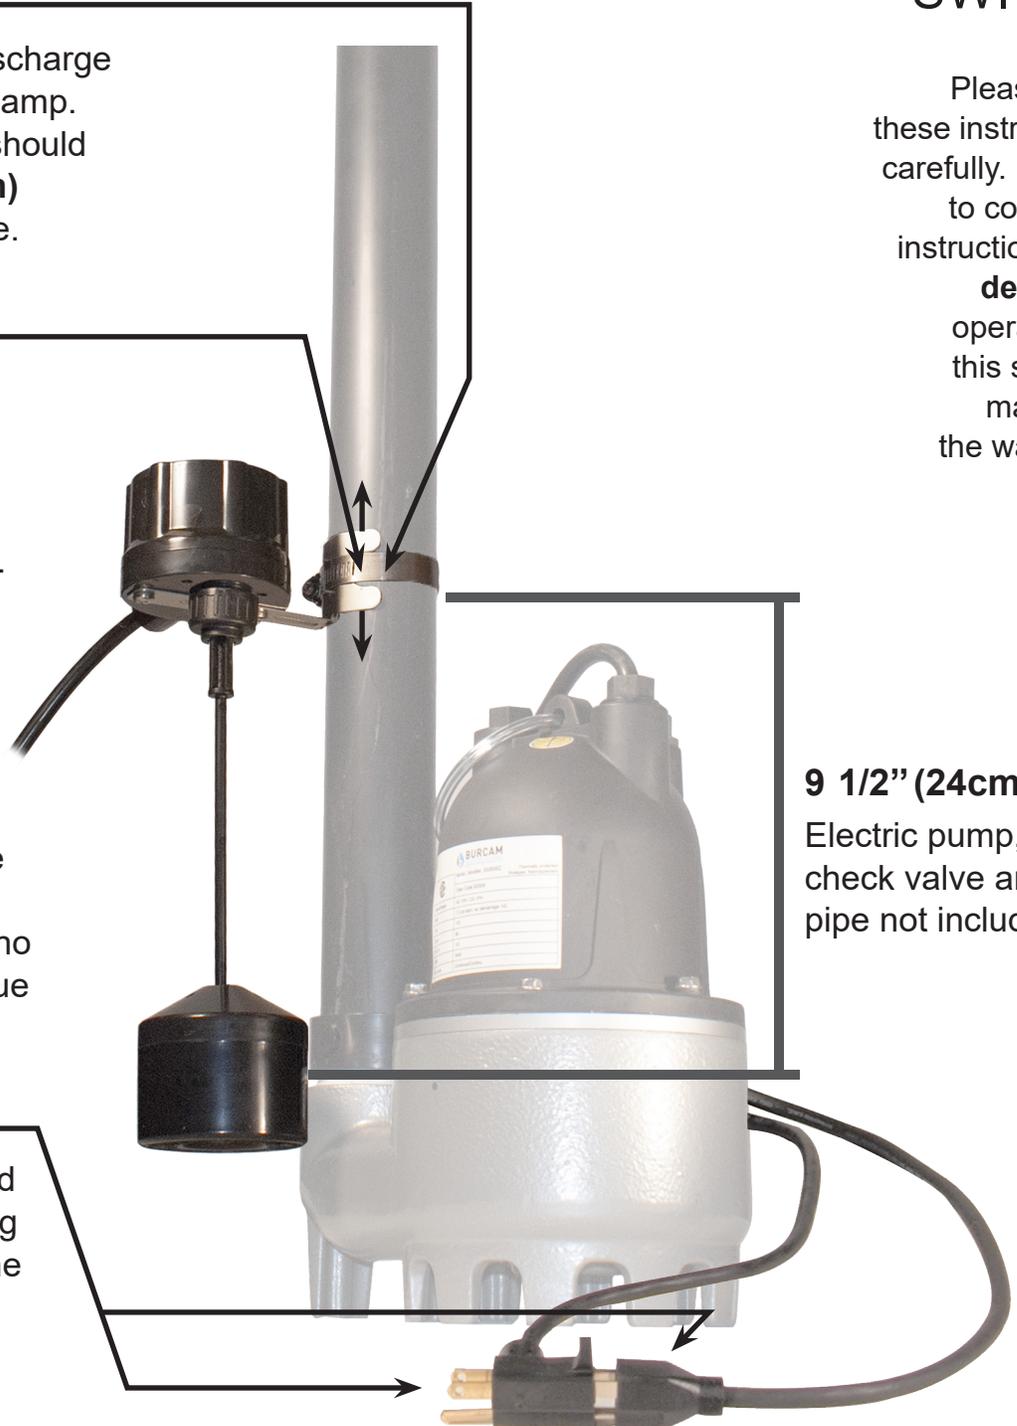

Please read these instructions carefully. **Failure** to comply to instructions and **designed** operation of this system, may **void** the warranty.

9 1/2" (24cm)
Electric pump, check valve and pipe not included.



INSTRUCTIONS D'INSTALLATION

MODÈLE 450446W

INTERRUPTEUR VERTICAL MAGNÉTIQUE

2190, Boul. Dagenais Ouest Tél. : 514.337.4415
Laval (Québec) Fax : 514.337.4029
Canada info@burcam.com
H7L 5X9 voir www.burcam.com

ÉTAPE 1


Installez l'interrupteur à la conduite de décharge en utilisant le collet ci-inclus. La base du collet devrait être positionnée à environ **24cm (9 1/2")** au-dessus de la décharge de la pompe.

ÉTAPE 2

L'ajustement du niveau minimum a été effectué en usine. Il est applicable à la plupart des pompes de puisard. Vous pouvez changer l'ajustement en haussant ou en baissant la position du collet. Lorsque la flotte est à son niveau le plus bas, le point de décharge de la pompe et l'entrée de la succion doivent être submergés pour prévenir l'aspiration d'air causant une poche d'air empêchant l'évacuation de l'eau.

ÉTAPE 3

Branchez l'interrupteur dans une prise, puis branchez la pompe à l'arrière de la fiche de l'interrupteur.

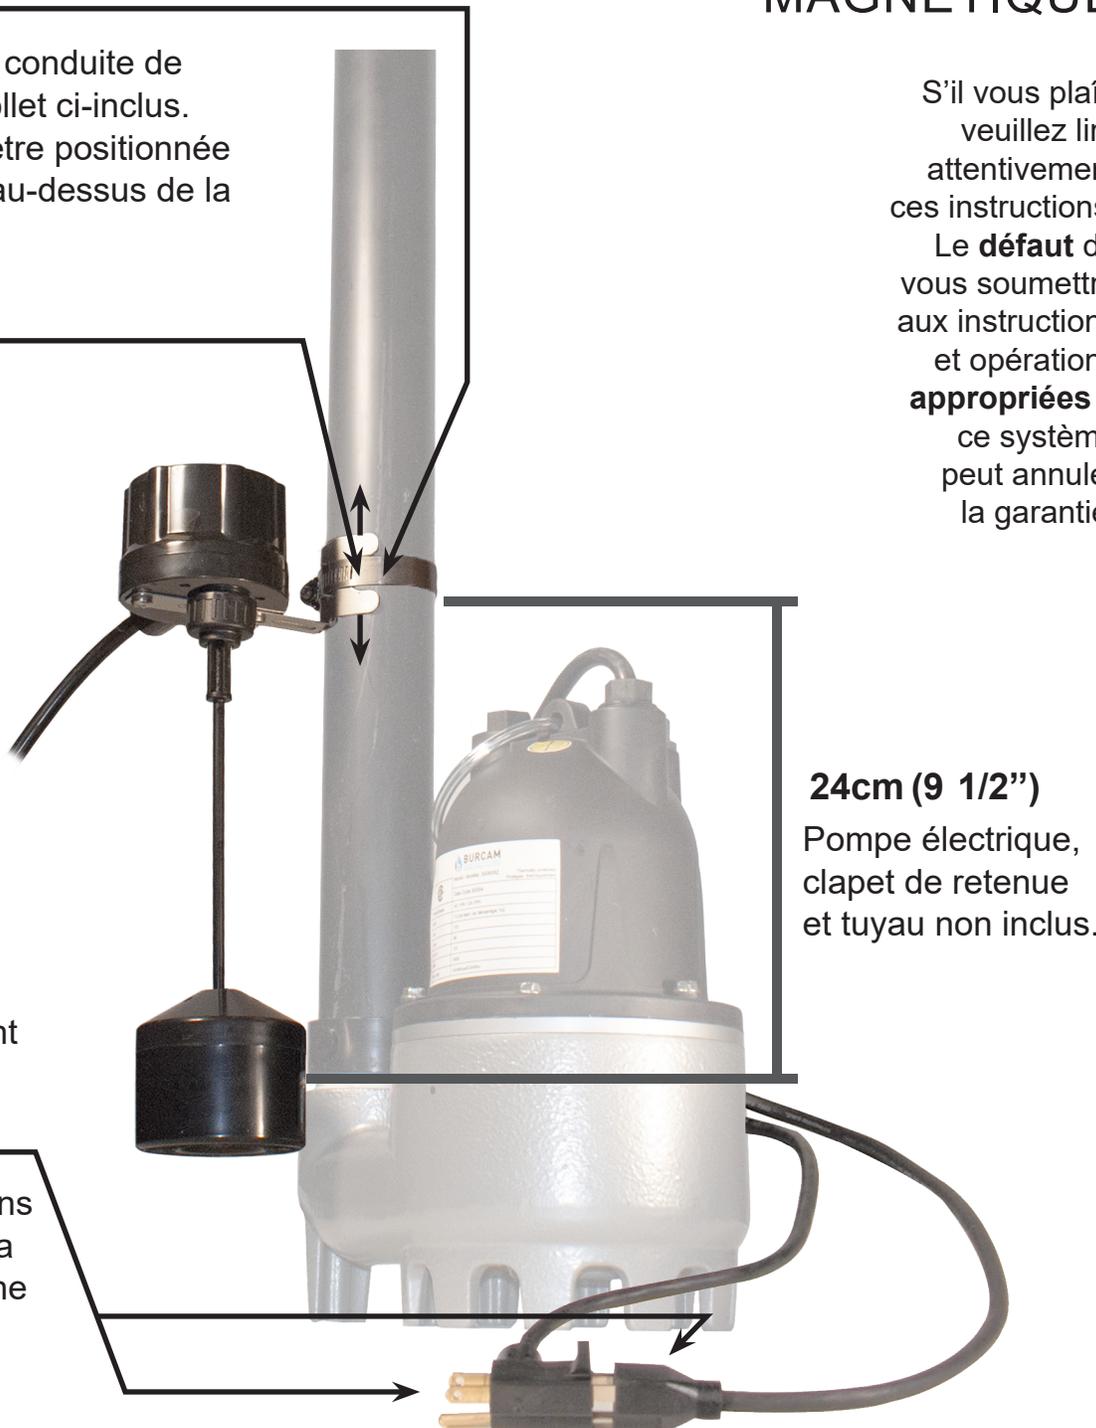

S'il vous plaît, veuillez lire attentivement ces instructions. Le **défaut** de vous soumettre aux instructions et opérations **appropriées** à ce système peut annuler la garantie.

24cm (9 1/2")
Pompe électrique, clapet de retenue et tuyau non inclus.